

SPECIFICATIONS

| | |
|------------------------------|--------------------------------|
| Nominal Voltage (V) | 12V |
| Capacity at C/100 | 84Ah |
| Capacity at C/20 | 73.6Ah |
| Weight | 53.6 Lbs. (24.3 kg) |
| Plate Alloy | Lead Calcium |
| Posts | Forged terminals & bushings |
| Container/Cover | Polypropylene |
| Operating Temperature Range | -76°F (-60°C) – 140°F (60°C) |
| Charge Voltage @ 68°F (20°C) | |
| Cycle | 2.30 - 2.35 VPC |
| Float | 2.25 - 2.30 VPC |
| Vent | Self-sealing (2 PSI operation) |
| Electrolyte | Sulfuric acid thixotropic gel |
| Resistance | 4.0 Milliohms (full charge) |
| Terminal | T872M |

Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A by East Penn Manufacturing

Distributed by:

Valve-Regulated, Gelled-Electrolyte Battery




DIMENSIONS

Length (mm) 10.88 (276 mm)

Width (mm) 6.75 (171 mm)

Height (mm) 9.88 (251 mm)

Cycling Ability

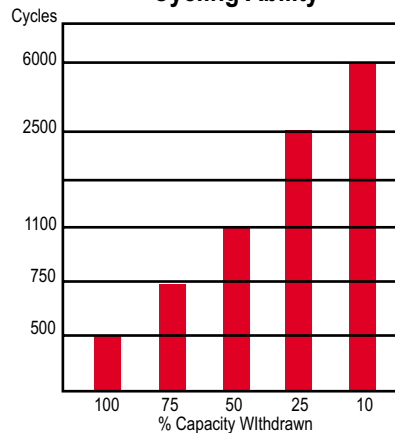

Number of cycles vs. depth of discharge at +20°C discharge with 20 hour rate