

SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	91Ah
Capacity at C/20	79Ah
Weight	53 (24 kg)
Plate Alloy	Lead Calcium
Posts	Forged terminals & bushings
Container/Cover	Polypropylene
Operating Temperature Range	-40°F (-40° C) – 140°F (60° C)
Charge Voltage @ 68°F (20°C)	
Cycle	2.40 - 2.43VPC
Float	2.25 - 2.30VPC
Vent	Self-sealing (2 PSI operation)
Resistance	3.0 Milliohms (full charge)
Terminal	T881

Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A by East Penn Manufacturing

Distributed by:


Valve-Regulated, Absorbed Glass Mat Technology



DIMENSIONS

Length (mm)	10.25 (260 mm)
Width (mm)	6.75 (171 mm)
Height (mm)	9.88 (251 mm)

Cycling Ability

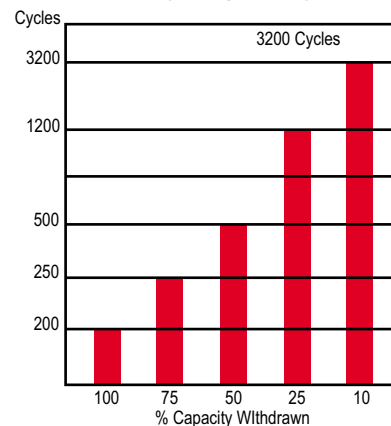

Number of cycles vs. depth of discharge
at +20°C
discharge with 20 hour rate